

12 EUROPEAN PATENT APPLICATION

21 Application number: 86305224.7

51 Int. Cl.⁴: A 61 F 13/18

22 Date of filing: 07.07.86

30 Priority: 09.07.85 GB 8517318

43 Date of publication of application:
25.02.87 Bulletin 87/8

84 Designated Contracting States:
AT BE CH DE FR GB IT LI NL SE

71 Applicant: WILLETT INTERNATIONAL LIMITED
Dawson House 24, Ladbroke Road
Chalvey Slough, SL1 2SR(GB)

72 Inventor: Ball, Jeffrey Maurice
22 Moorfield Road
West Didsbury Manchester 20(GB)


74 Representative: Dummett, Thomas Ian Peter et al,
T.I.P. DUMMETT & Co 14 The Square
Martlesham Heath Ipswich IP5 7SL(GB)

54 Coding of absorbent materials.

57 The present invention provides a process for marking a diaper fabric which comprises applying to the fabric one or more images by means of an ink jet printing technique during the fabrication of the diaper from its component materials. Preferably, the invention is used to apply a fluid indicator fluid to that face of the impervious layer (3) to be in contact with the absorbent layer (1) during the manufacture of the composite diaper fabric, the other face of the absorbent layer (1) being that which is to be directly or indirectly in contact with a

wearer of the diaper. It is also preferred that the indicator fluid comprise a water-soluble dyestuff whereby the indicator is rendered mobile upon contact with a fluid.

The invention further provides a diaper having an image formed thereon, preferably on that face of the impervious layer in contact with the absorbent layer, which image comprises a series of dots configured to form the desired image, preferably the image is formed from a water-soluble dyestuff.

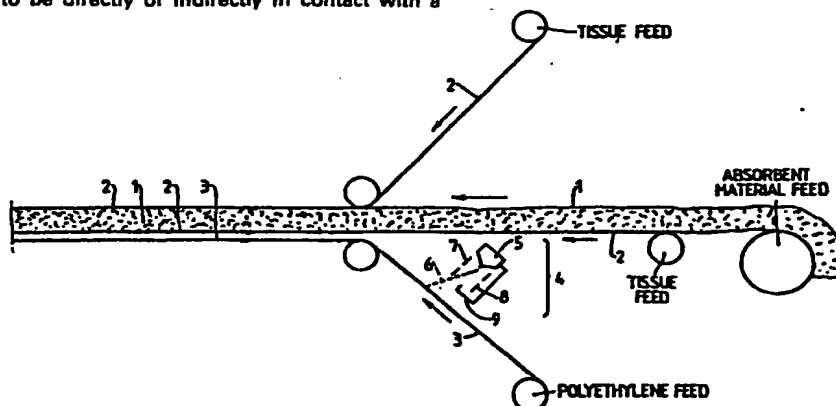

TITLE: CODING OF ABSORBENT MATERIALS

The present invention relates to the coding of absorbent materials, notably to the marking of manufacturing and other codes on a diaper, particularly to provide a fluid mobile
5 marking to indicate when the diaper has been wetted.

In the production of diapers, a layer of an absorbent material such as a flocked, felted or needled fabric, tissue or reticulated material or cotton wool-like material is combined with an impervious material, the absorbent layer
10 being designed to absorb urine and other body fluids from the person wearing the diaper and the outer layer being designed to prevent escape of these from the absorbent layer into the environment. Whilst the final form of the finished diaper may differ from manufacturer to manufacturer, the above
15 construction of the diaper fabric is common to substantially all designs of diaper and is produced by similar techniques.

It would be desirable to be able to print date, quality control and other manufacturing codes on each batch of diaper fabric and to give each individual diaper the manufacturer's
20 brand name or other indicia to aid marketing of the diapers. However, the lengths of material which are to be combined to form the composite diaper fabric travel at high speeds and it would be necessary to ensure accurate registration of the printing with the fast moving material so that the printed
25 images occur at the desired location on each diaper. This is

difficult and any relative movement between the printing head and the material being printed would cause blurring of the image. Furthermore, the fluffy nature of the absorbent layer would cause major problems due to fluff contamination of the printing head. It has been therefore been proposed to use pre-printed material carrying random images on the material so as to avoid the need for accurate registration between the various components used to make up the diaper fabric. However, this requires that a production line be designated to a given product or that the operation of that line must be interrupted to change from one feed of pre-printed material to another where it is desired to change the image in the diaper fabric being produced.

We have found that ink jet printing techniques provide an advantageous method for marking quality control codes and the like onto a diaper during its manufacture, notably onto the inner face of the impervious layer of the diaper fabric. An ink jet printer is a non-contact type of printer and reduces problems due to fluff contamination and snagging of the material being printed with the print head which occur with contact type printers as used hitherto. Furthermore, an ink jet printer produces an image which can be readily altered without the need to close down a printing line to change printing plates and the like, thus enabling a manufacturer to vary the image produced to suit a purchaser's individual

requirements and to switch between one image and another at will without having to stop the diaper fabric production line. The print head for an ink jet printer is compact and therefore can readily be incorporated into a diaper fabric
5 production line without disruption of the layout of the line or interference with other operations in the production line. Furthermore, an ink jet printer can operate at high speeds to secure accurate positioning of the image on a fast moving component of the diaper fabric immediately prior
10 to that component being incorporated into the diaper fabric, thus reducing the problems of registration of the image with the diaper fabric.

Accordingly, the present invention provides a process for marking a diaper which comprises applying one or more images
15 to one or more components of the diaper by means of an ink jet printing technique. Preferably, the invention is used to apply an indicator fluid to that face of the impervious layer of a composite diaper fabric to be in contact with the absorbent layer, the other face of the absorbent layer being
20 that which is to be directly or indirectly in contact with a wearer of the diaper. Preferably, such application takes place during the process of manufacture of the composite diaper fabric rather than during the fabrication of the individual components for subsequent use in the manufacture
25 of the composite fabric. It is also preferred that the

indicator fluid contain a water-soluble dyestuff and that the indicator fluid be rendered mobile upon contact with a bodily fluid.

The invention further provides a diaper fabricated from a composite fabric having an image formed thereon, preferably on that face of the impervious layer in contact with the absorbent layer, which image comprises a series of dots configured to form the desired image. Preferably the image is formed from a water-soluble dyestuff.

10 The invention can be applied to all types of diaper and to form any desired image on the diaper. Thus, the invention can be applied in the manufacture of incontinence pads, as well as to diapers for infants. The term diaper is therefore used herein to denote in general a composite construction comprising a liquid impervious layer having in association therewith a fluid absorbent layer adapted to be in contact directly or indirectly with a wearer of the diaper, the construction being in sheet, strip or pad form and intended for use upon the person. The term diaper fabric is used 15 herein to denote this construction prior to cutting or otherwise forming the individual diapers therefrom.

The fluid applied to the diaper fabric can be one which is visible under UV light or one which carries magnetic particles to provide an image which can be scanned by a magnetic sensor for use in quality control or other 25

manufacturing control operations. However, the invention is of especial use in the application of a dyestuff to the diaper fabric to provide an image which can be used for marketing purposes and/or to provide an indicator which
5 disperses or intensifies and/or changes in colour to indicate when the diaper has been wetted by the wearer. For convenience, the invention will be described hereinafter in terms of this preferred use and in terms of a diaper which comprises an absorbent layer comprising a cotton-wool-like
10 cellulosic material as the absorbent material encased in a water permeable casing such as non-woven, felted, needled or similar tissue-like material, and a sheet plastic material mounted on one side of the absorbent layer to provide an outer impervious layer.

15 The diaper fabric can be manufactured by any suitable method. This will usually comprise bringing together lengths of the absorbent material, the casing for that material and the impervious layer on a continuous basis to form the basic diaper fabric. This is then subjected to such other
20 treatments, eg. folding the fabric to adopt the desired configuration, applying side fastenings and so on, as may be required to form the individual diapers. The present invention is not restricted to any specific method by which the diaper fabric is formed nor its subsequent treatment and
25 these can be of conventional nature. As indicated above, the

invention is preferably applied to the material of the impervious layer as this is or is about to be incorporated with the other components into the composite diaper fabric.

The present invention therefore further provides in a
5 diaper fabrication process a printer station located in association with the feed of one or more of the component materials for the diaper fabric and adapted to apply a fluid to the material by means of an ink jet printer. In the preferred embodiment of the invention, the printing station
10 is located on the feed path of the impervious material so that it forms an image on that face of the material which is to be in contact with the absorbent layer in the composite diaper fabric. Thus, when the impervious material is combined with the absorbent layer or with the components used
15 to form that layer to give the diaper fabric, the image is located between the impervious and absorbent layers and is protected from smearing or abrasion during subsequent handling or use by the impervious layer, but is visible through that layer.

20 The image can be formed by any suitable ink jet printing technique. Thus, the image can be formed using an on-demand printer in which droplets of ink are dispensed from an array of nozzles located across the line of travel of the fabric. Each nozzle is fed with ink, usually under pressure, through
25 a valving means, eg. a solenoid valve. The sequence of

operation of the valves is controlled by a micro-processor or the like so that they are actuated in the desired order to emit droplets to form the desired image. Typical of suitable ink jet printers of this type for present use are those sold
5 by Willett Printos Limited as LCP printers.

Alternatively, the ink is dispensed continuously through a nozzle as a discrete single jet which passes through a charge electrode. The stream of ink is excited by applying a vibration thereto to break the stream up into substantially
10 uniform droplets, eg. by exciting a piezo-electric crystal in contact with the ink. The charged droplets are passed through an electric field which causes the droplets to be deflected away from their natural flight path. The extent of deflection is controlled by the charge applied to the droplet
15 and/or the strength of the deflecting field. Thus, the flight path of each droplet can be controlled so that it falls upon the desired location on the impervious material or into a catcher mechanism or gutter where it is desired that no image be printed with that droplet. Droplets falling into
20 the gutter are re-cycled for re-use. Typical of such printers are those available as Willett Printos 1600 printers.

Other suitable ink jet printers include those in which the ink composition is drawn from the nozzle by electrostatic
25 forces to give charged droplets which can be guided as

described above; those where the droplets are drawn through the nozzles by capillary action; and those where the ink composition is heated within the printing head immediately adjacent the nozzle so as to form a vapour bubble which expels the ink through the nozzle.

The above forms of printer are characterised in that they are non-contact printers and hence do not crush or otherwise affect the structure of the diaper fabric nor do they present an obstruction to the free passage of material past the printing station. The operation of the printer can be closely synchronised with the movement of the substrate upon which printing is to take place. Hence, accurate registration of the printed images with the impervious material or the diaper fabric can be achieved, even where the speed of travel of the material being printed varies.

The image which is formed can be selected at will by the operator so as to identify a batch of diaper fabric for manufacture or quality control purposes. However, it is preferred that images be formed at appropriate intervals on the impervious material so that each individual diaper carries an image printed thereon which will vary when the diaper is wetted by a body fluid. The images formed by an ink jet printer are characterised by being composed of a number of dots, whereas conventional contact printing techniques, such as are proposed in for example US Patent

4022211, give continuous images which readily smudge if there is not complete co-ordination between the fabric being printed and the printing plattern.

The indicator fluid used to form the image can be of any
5 suitable composition, for example it can be a solvent or
water based ink. Preferably, the ink composition is one
which is rendered mobile upon subsequent contact with body
fluids so that the image forms a smudge visible through the
outer impervious plastics layer when the wearer wets the
10 diaper. This smudge provides a simple and effective
indicator that the diaper has been wetted by the wearer.
Alternatively, the ink composition can be one which develops
a colour or intensifies and/or changes colour when contacted
with a body fluid. It is therefore preferred that the
15 indicator composition contain a physiologically acceptable
water-soluble dyestuff, notably one which is a food grade
material. The optimum composition for application to the
diaper fabric will depend upon the intensity of colouration
required both when dry and when wetted, and can be readily
20 determined in each case. It is a further advantage of the
use of an ink jet printer that the ink composition can be
readily changed merely by using a secondary printing head
without the need to halt the diaper fabrication process.

As indicated above, the composite diaper fabric can be
25 subjected to further treatment to form the individual diaper

units. It is also within the scope of the present invention to give the printed component one or more subsequent treatments before it is incorporated into the diaper fabric. Thus, the printed image can be dried to avoid the risk of smudging as the overall diaper fabric is built up or it can be printed with other images.

The invention will now be illustrated by the following Examples in which all parts and percentages are given by weight:

Example 1:

A diaper fabric comprising an absorbent layer 1 of cotton wool-like material encased in a needled tissue like cellulosic material 2 and having an outer sheet polyethylene plastics impervious layer 3 was formed by feeding webs of the individual components through a conventional high speed diaper manufacturing line shown diagrammatically in the accompanying drawing. A Willett Printos 1600 continuous ink jet printer head 4 was located over the sheet feed of the polyethylene sheet so as to print dot matrix images thereon 16 dots high.

The printer head comprised a nozzle 5 fed with an ink composition to form a jet of fluid issuing from the nozzle. This jet was broken up into a series of discrete mono-sized and substantially uniformly spaced apart droplets 6 by

excitement with a piezoelectric crystal acting on the ink.

At or above the point at which the jet broke up into droplets, was mounted a charge electrode 7 which applied a varying charge to the droplets. The charged droplets passed between a pair of charged deflection plates 8 which generated an electric field which caused the droplets to deflect from their free flight path by an amount which depended upon the charge carried by the droplet. The extent of deflection determined the position at which the droplet was deposited on the polyethylene web 3 and hence the image formed. Where it was desired not to deposit a droplet on the polyethylene sheet the droplet was not given a charge and followed its free flight path into a gutter or other catching means 9 which intercepted the path of the droplet. The droplets caught in the gutter were recycled for re-use.

The printer 4 used an ethanol based ink composition containing a food grade water-soluble blue dyestuff. The resultant diapers each possessed a clearly visible blue image formed from a series of dots on the inner surface of the polyethylene layer 3.

When worn by a small child, the image could be seen without removing the diaper. When the child wetted the diaper, the image became smudged and provided a clearly visible indication of when the diaper needed changing.

Example 2:

The process of Example 1 was repeated except that the ink composition was a water/ethanol based composition containing a polymeric binder to provide a composition which rapidly
5 dried upon application to the polyethylene sheet. When the printed image from such a composition was wetted, the dyestuff dispersed and the image faded in the wetted area.

Example 3:

10 The process of Example 1 was repeated except that the coloured dyestuff was replaced with a colourless but UV fluorescent agent. The resultant image on the diaper fabric could be read under UV illumination for quality control purposes but did not give an image which could be detected by
15 a user under normal conditions.

20

25

CLAIMS:

1. A method for marking a diaper characterised in that it comprises applying one or more images to one or more components of the diaper by means of an ink jet printing technique.
2. A method according to claim 1 characterised in that the diaper has a composite construction comprising a substantially fluid impervious layer having in association therewith a fluid absorbent layer adapted to be in operative contact with a wearer of the diaper, the construction being in sheet, strip or pad form and intended for use upon the person, one or more elements of the diaper construction carrying an image thereon.
3. A method as claimed in claim 2 characterised in that the image is applied during the fabrication of the diaper fabric from its component materials.
4. A method as claimed in either of claims 2 or 3 characterised in that a fluid indicator is applied to that face of the impervious layer to be in contact with the absorbent layer during the manufacture of the composite diaper fabric, the other face of the absorbent layer being that which is to be in operative contact with a wearer of the

diaper.

5 5. A method as claimed in any one of claims 1 to 4
characterised in that the indicator fluid comprises a water
soluble dyestuff.

10 6. A method as claimed in claim 4 characterised in that an
ink jet printer is located on the feed path of the impervious
material to a process for unifying the elements of the
composite diaper fabric so that it forms an image on that
face of the material which is to be in contact with the
absorbent layer of the resultant composite diaper fabric.

15 7. In a process for making a diaper fabric having a
composite construction comprising a substantially fluid
impervious layer formed from a polyethylene material and
having in association therewith a fluid absorbent layer
formed from a cellulosic fibrous material which fabric is
subsequently to be formed into a diaper adapted to be worn
20 upon the person with said absorbent layer being in operative
contact with the person so as to absorb body fluids
therefrom, which process comprises feeding the elements of
the composite fabric to a process in which they are unified
into the said composite fabric, the improvement which
25 comprises forming an image from a series of dots on that face


of the said polyethylene sheet material to be in operative contact with said absorbent layer by applying thereto a fluid indicator composition by means of an ink jet printer located intermediate the feed of said material and its incorporation into the composite fabric.

8. A process as claimed in claim 7 characterised in that said indicator composition comprises a water-soluble dyestuff whereby the image formed is caused to disperse when a diaper
0 formed from the composite fabric is wetted by a wearer.

9. A diaper fabrication apparatus for use in a method or process as claimed in any one of claims 2 to 8 characterised in that a printer station is located intermediate the feed of
5 one or more of the component materials and the process at which they are unified into the composite diaper fabric which printing station is adapted to apply a fluid to the material by means of an ink jet printer.

10. A diaper having a composite construction comprising a substantially fluid impervious layer having in association therewith a fluid absorbent layer adapted to be in operative contact with a wearer of the diaper characterised in that an element of the diaper construction carries an image formed from a series of dots configured to form the desired image.

///

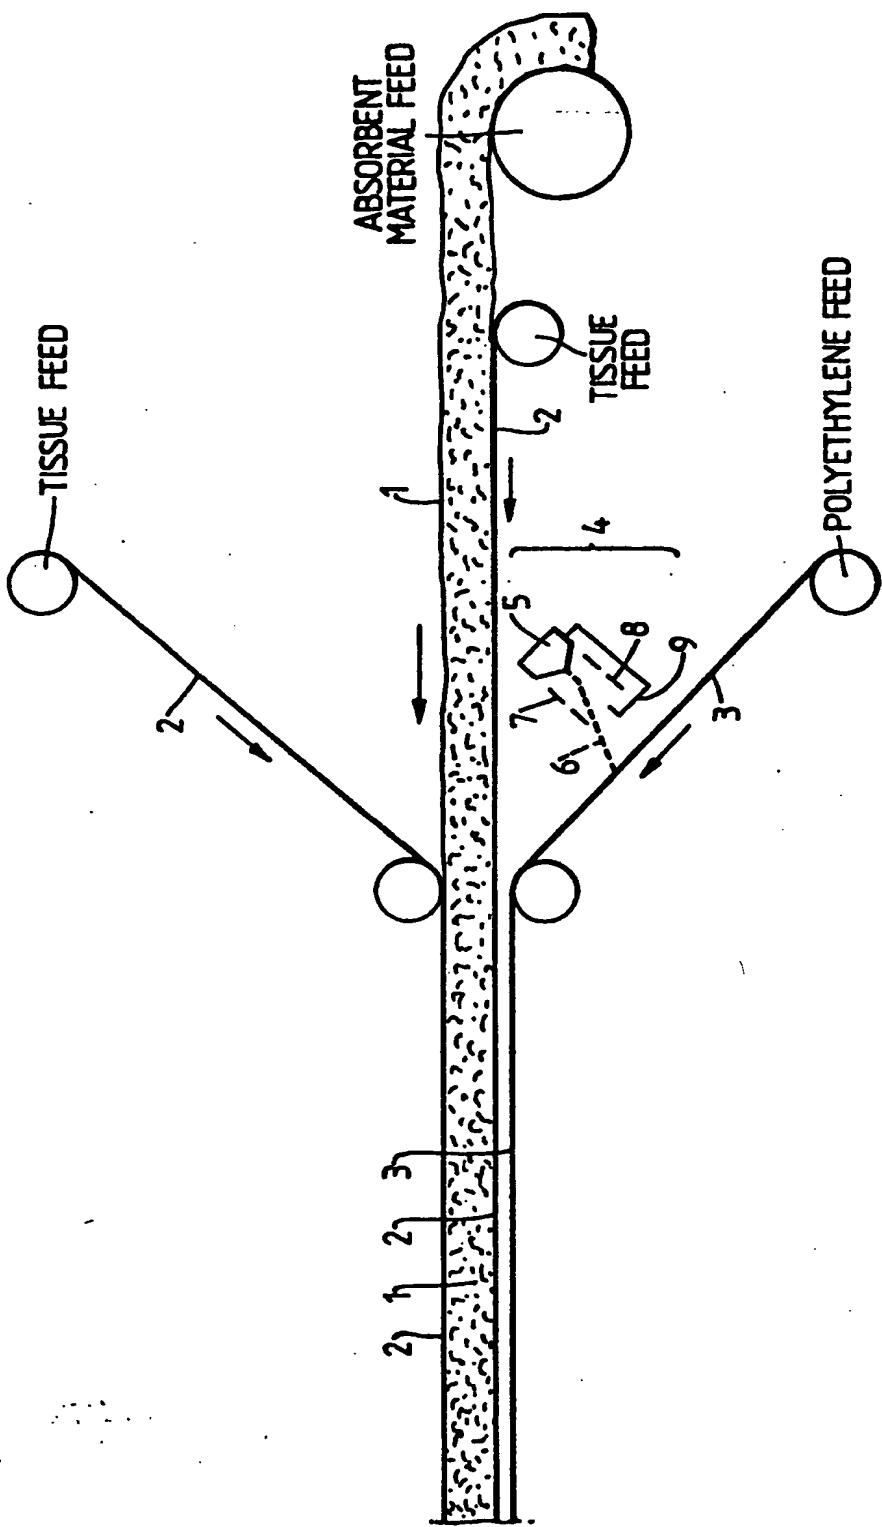



European Patent
Office

EUROPEAN SEARCH REPORT

0211524

Application number

EP 86 30 5224

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 4)
X	US-A-4 022 211 (KIMBERLEY-CLARK) * Whole document *	1-10	A 61 F 13/18
A	US-A-4 249 532 (POLANSKY)		
A	US-A-3 702 610 (KIMBERLEY-CLARK)		
			TECHNICAL FIELDS SEARCHED (Int. Cl. 4)
			A 61 F A 41 B
The present search report has been drawn up for all claims			

Place of search
THE HAGUE

Date of completion of the search
21-10-1986

Examiner
STEENBAKKER J.

CATEGORY OF CITED DOCUMENTS

X : particularly relevant if taken alone
Y : particularly relevant if combined with another document of the same category
A : technological background
O : non-written disclosure
P : intermediate document

T : theory or principle underlying the invention
E : earlier patent document, but published on, or after the filing date
D : document cited in the application
L : document cited for other reasons
A : member of the same patent family, corresponding document